

To install a TV using a PD181-768, 100x200 offset adapter plate, onto a Peerless mount.

Tool List:

- 1. Safety glasses/goggles
- 2. P1 or P2 Phillips screwdriver
- 3. 3/8 inch socket and ratchet or wrench

Safety Steps:

- 1. Always wear safety glasses/goggles to prevent injury from debris.
- 2. Follow the installation/removal instructions for your existing products.


Supplied Parts List:


- 1. PD181-768
- 2. PDINILN1032 NYLOC NUT (2)
- 3. PDIFW10 FLAT WASHER (2)

PROCEDURE:

Step 1:

Insert the two studs of the PD181-768 through the bottom two holes of the existing 100mm x 200mm mounting pattern and install the supplied washers and lock nuts.

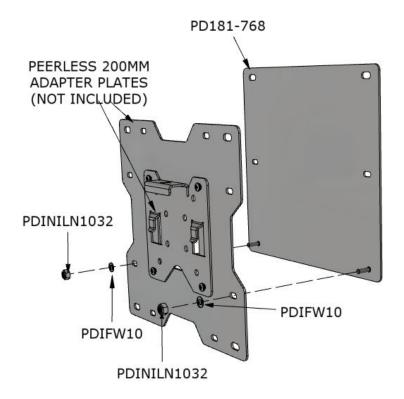





Attach this assembly the mounting holes, 100mm x 200mm pattern, on the back of the TV to be mounted. Use the mounting hardware that comes from the existing mount.

Step 3:

Attach the TV and mounting plates per the assembly instructions of the original mount to finish the installation.

